

Bulk storage unit

Shallow drawers + solid worktop



Applications


- Provides back up storage, close to the point of use, for maximum efficiency during busy service periods.
- With our Low Velocity Cooling system, food can be packed into the drawer without leaving any air gaps - there are no 'hot-spots' in an Adande Drawer.
- On request, Adande units can be arranged in mixed configurations, combining Multi-Temperature with Fridge Only Drawer.

Hydrocarbon R600a Refrigerant

Shallow drawer

'B' Energy Rating
in Freezer Mode

'A' Energy Rating
in Fridge Mode
(Consumption 325
kWh/annum)

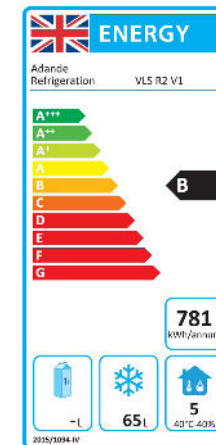

+15°C ↔ -22°C



Storage Capacity

Gastronorm (GN) Pans
4 x 1/1 GN
75 mm Deep
or equivalent (per Drawer)

Maximum Weight
30 kg of Food (per Drawer)

Volume
65 Litres (per Drawer)

Climate Testing

Tested to **Climate Class 4**
(30°C & 55% relative humidity)
for temperature and energy
consumption and to **Climate
Class 5** (40°C & 40% relative
humidity) for temperature

Electrical

Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug
fitted for each country

Mains Lead (included)
2 Metre Coiled Lead

Options


SHALLOW DEPTH DRAWER UNITS + COVER TOP (T)	Standard castor base (C)	
Finished height	1114 mm	VLS3/CT
Load-bearing capacity	0 kg	

SHALLOW DEPTH DRAWER UNITS + SOLID WORKTOP (W)	Standard castor base (C)	
Finished height	1123 mm	VLS3/CW
Load-bearing capacity	155 kg	

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


Plan View

Bulk storage units
Shallow depth drawers (VLS3)
With open drawer

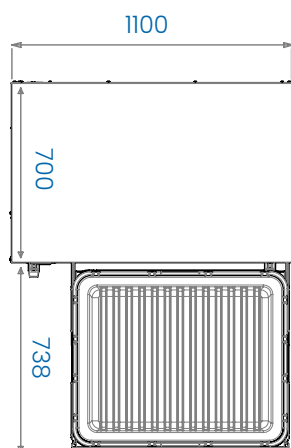

Elevation

Bulk store – shallow depth 3 drawer
Fridge to freezer unit (VLS3)
Standard castors (C)
Cover top (T)
VLS3/CT

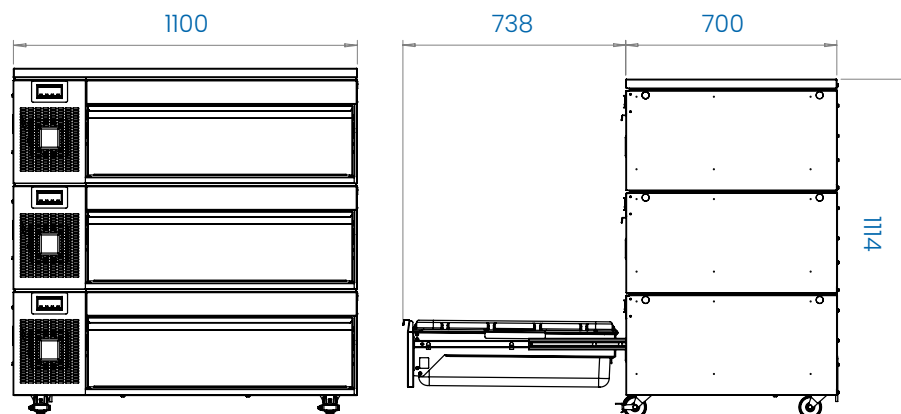

Tops



Three Drawer Module



Base

