

## Prep station

Shallow drawers + solid worktop



## Applications


- Bulk storage at the point of use
- Ideal for meat, deli and larder prep
- Suitable for pastry and dessert prep
- Perfect storage for garnish and 'mise en place' generally
- Frozen storage next to deep fry station, with worktop mounted Fry Basket Rack as an optional extra

### Hydrocarbon R600a Refrigerant

#### Shallow drawer

'B' Energy Rating  
in Freezer Mode

'A' Energy Rating  
in Fridge Mode  
(Consumption 325  
kWh/annum)

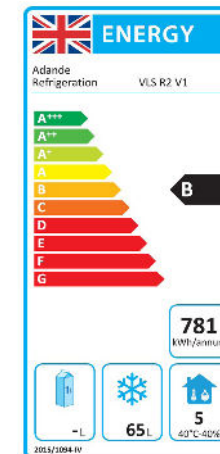

## Storage Capacity

**Gastronorm (GN) Pans**  
4 x 1/1 GN  
75 mm Deep  
or equivalent (per Drawer)

**Maximum Weight**  
30 kg of Food (per Drawer)

**Volume**  
65 Litres (per Drawer)

## Climate Testing

Tested to **Climate Class 4**  
(30°C & 55% relative humidity)  
for temperature and energy  
consumption and to **Climate  
Class 5** (40°C & 40% relative  
humidity) for temperature

## Electrical

**Mains Supply**  
230 Vac 50 Hz

**Power Socket** (included)  
Correct 2 or 3 Pin Plug  
fitted for each country

**Mains Lead** (included)  
2 Metre Coiled Lead




## Options

| PREP STATION +<br>SOLID WORKTOP (W) | High castor<br>base (HC) |          | Standard castor<br>base (C) |         | Small castor<br>base (SC) |          | Rollers &<br>feet base (R) |         | Small rollers &<br>feet base (SR) |          | Locking roller<br>base (L) |         | Small locking<br>roller base (SL) |          |
|-------------------------------------|--------------------------|----------|-----------------------------|---------|---------------------------|----------|----------------------------|---------|-----------------------------------|----------|----------------------------|---------|-----------------------------------|----------|
| Finished height                     | 855 mm                   | VLS2/HCW | 784 mm                      | VLS2/CW | 763 mm                    | VLS2/SCW | 739 mm                     | VLS2/RW | 729 mm                            | VLS2/SRW | 739 mm                     | VLS2/LW | 729 mm                            | VLS2/SLW |
| Load-bearing capacity               | 137 kg                   |          | 214 kg                      |         | 439 kg                    |          | 240 kg                     |         | 241 kg                            |          | 213 kg                     |         | 213 kg                            |          |

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


## Plan View

Prep station (VLS2)  
With open drawer

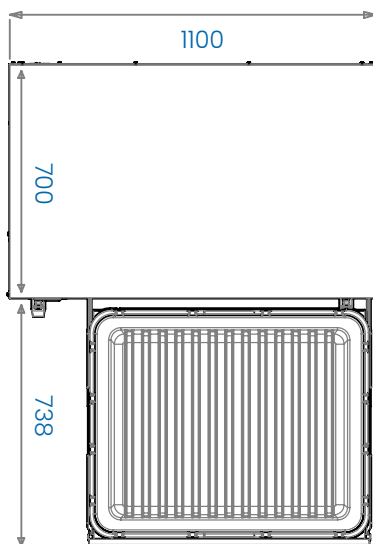

## Elevation

Counter prep station  
Shallow drawer (VLS2)  
Standard castors (C)  
Solid worktop (W)  
VLS2/CW

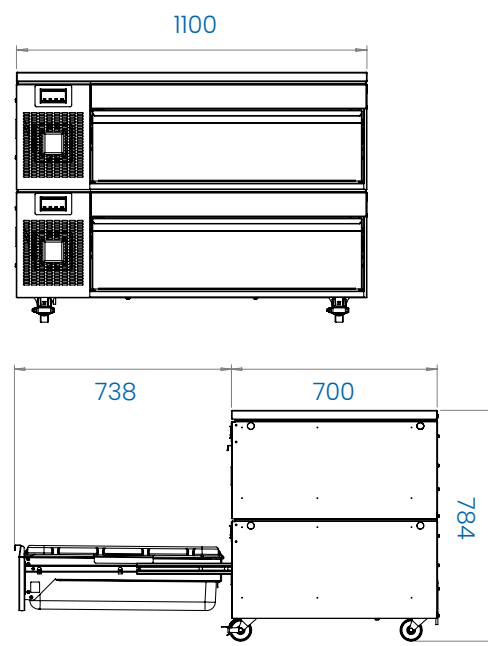

Height shown on standard castors

## Tops



## Double Drawer Module



## Base

