

Combo cassette drawer


A+ fridge above shallow drawer (ASS2)
or shallow above A+ fridge drawer (SAS2)



Applications


- Ergonomic storage solution, right at the point of use
- Ideal for meat, deli & dessert prep
- Perfect for garnish and 'mise en place' generally
- Frozen storage by the deep fry station, with worktop mounted Fry Basket Rack as an optional extra

Hydrocarbon R600a Refrigerant

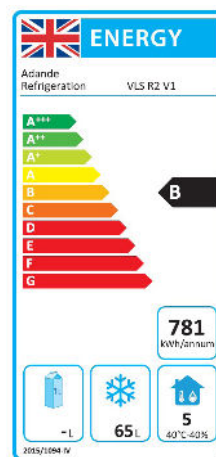

Shallow Drawer

'B' Energy Rating in freezer mode
'A' Energy Rating in fridge mode
(Consumption 325 kWh/annum)

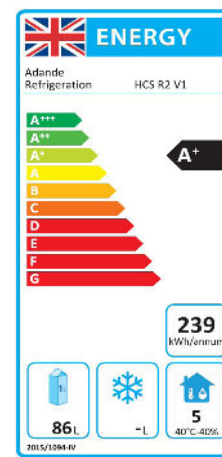

A+ Fridge Drawer

'A+' Energy Rating
(Consumption 239 kWh/annum)



Storage Capacity

Standard Drawer

Gastronorm Pans
4 x 1/1 GN
100 mm Deep
or equivalent

Maximum Weight
40 kg of Food

Volume
86 Litres

Shallow Drawer

Gastronorm Pans
4 x 1/1 GN
75 mm Deep
or equivalent

Maximum Weight
30 kg of Food

Volume
65 Litres

Climate Testing

Tested to **Climate Class 4**
(30°C & 55% relative humidity)
for temperature and energy
consumption and to **Climate
Class 5** (40°C & 40% relative
humidity) for temperature

Electrical

Mains Supply
230 Vac 50 Hz

Power Socket (included)
Correct 2 or 3 Pin Plug
fitted for each country

Mains Lead (included)
2 Metre Coiled Lead

Options


Shallow above A+ fridge drawer – code: [SAS2](#) or A+ fridge above shallow drawer – code: [ASS2](#)

COMBO 2 DRAWER CASSETTE + SOLID WORKTOP (W)	Flat base (FB)		COMBO 2 DRAWER CASSETTE + COVER TOP (T)	Flat base (FB)	
Finished height	766 mm	SAS2/FBW & ASS2/FBW	Finished height	757 mm	SAS2/FBT & ASS2/FBT
Load-bearing capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit		Load-bearing capacity	Check weight capacity of cook range or other fabricated housing of the Adande Cassette unit	

For full options please see our [Drawer Customising and Accessories](#) pages


Plan View

One drawer cassette ([SAS2 & ASS2](#))
With open drawer

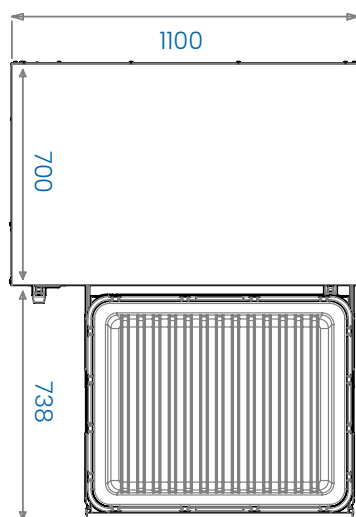

Elevation

Combo cassette unit ([SAS2 & ASS2](#))
Flat base (FB)
Cover top (T)
[SAS2/FBT \(Illustrated\) & ASS2/FBT](#)

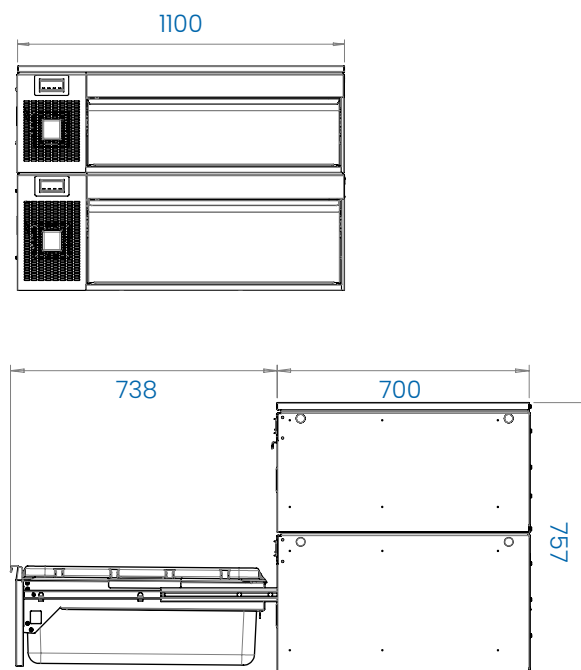

Tops



Drawer Module



Base

